

RUBBER FLOORING  
IN PLANKS

NEOFLEX  
**CROSSHATCH**  
SERIES



# Neoflex Crosshatch Series.

Neoflex™ Crosshatch Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor fitness and leisure settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Fitness Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.








**Color**  
488 CX16 HT07

**Thickness**  
8 mm

**Installation**  
Random

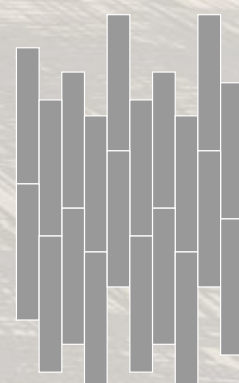






**Color**  
488 CX10 HT11

**Thickness**  
6 mm

**Installation**  
Random

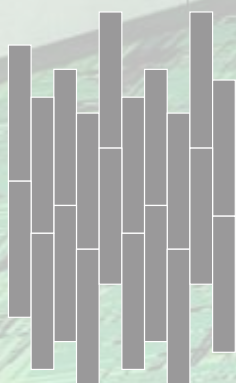



## Inspired by Art.

Inspired by traditional artistic shading methods, Neoflex Crosshatch Series is designed to add depth and texture to a floor, creating a memorable aesthetic.


Neoflex Crosshatch Series showcases outstanding color combinations across its 28 colorways, giving the floor a strong presence that is both dramatic, tonal and profound.










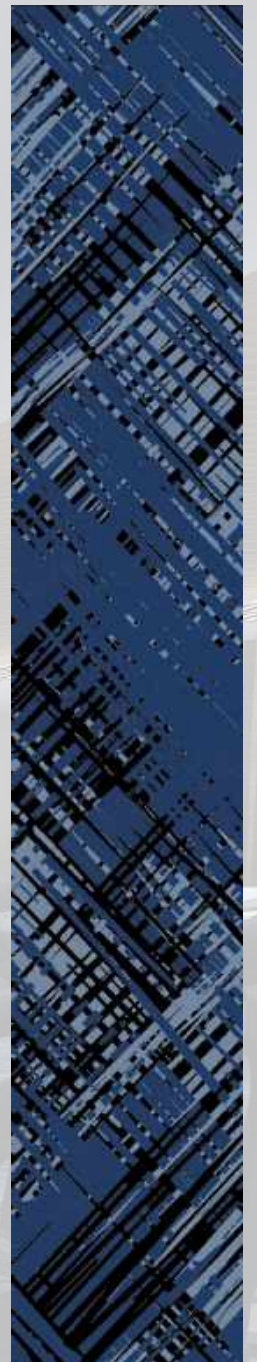

**Color**  
488 CX08 HT20

**Thickness**  
10 mm

**Installation**  
Random

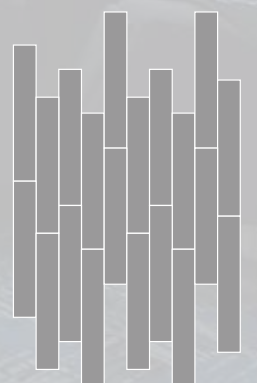






**Color**  
488 CX05 HT07

**Thickness**  
10 mm

**Installation**  
Random

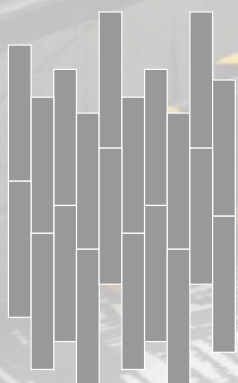




# In A Unique Format.

Neoflex Crosshatch Series is supplied in 1200 mm x 200 mm modular planks.

With five unique planks, designed to be laid at random, a truly sophisticated floor can be created that avoids repetition.

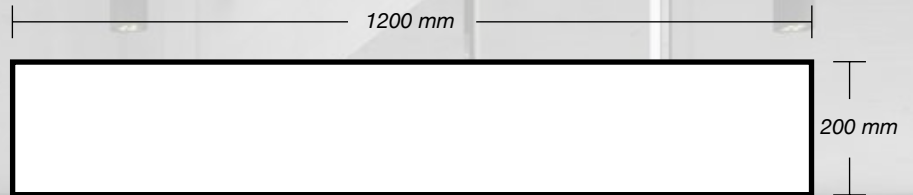











**Color**  
488 CX02 HT04

**Thickness**  
2.5 mm

**Installation**  
Random

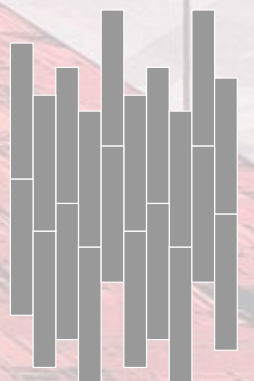




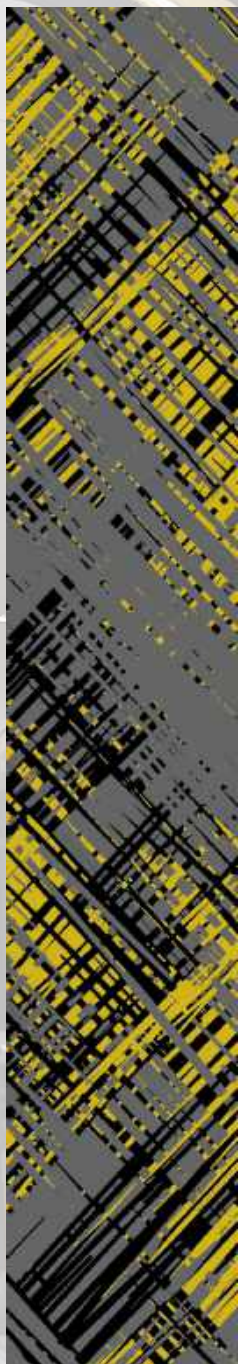

**Colors**  
488 CX13 HT06

**Thickness**  
8 mm

**Installation**  
Random

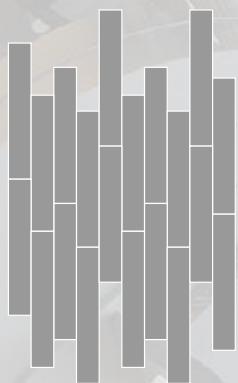








# Fit for Purpose.

Neoflex Crosshatch Series Fitness Flooring is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts by free-weights or kettle-bells and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.






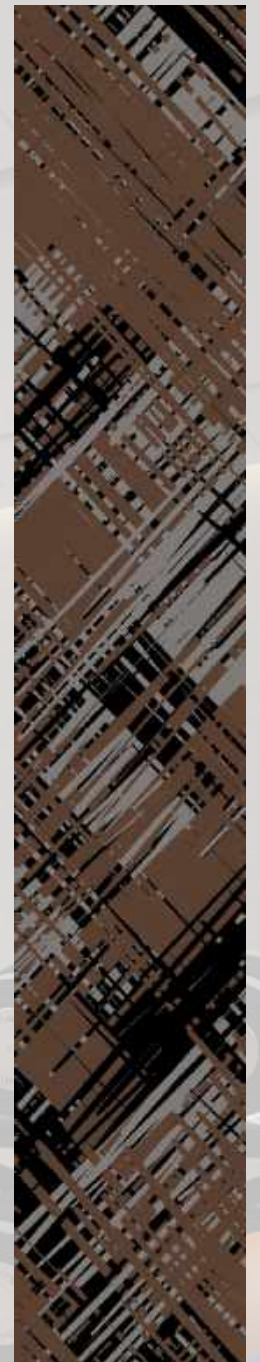


**Color**  
488 CX06 HT18

**Thickness**  
10 mm

**Installation**  
Random

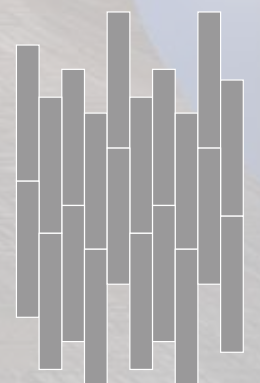




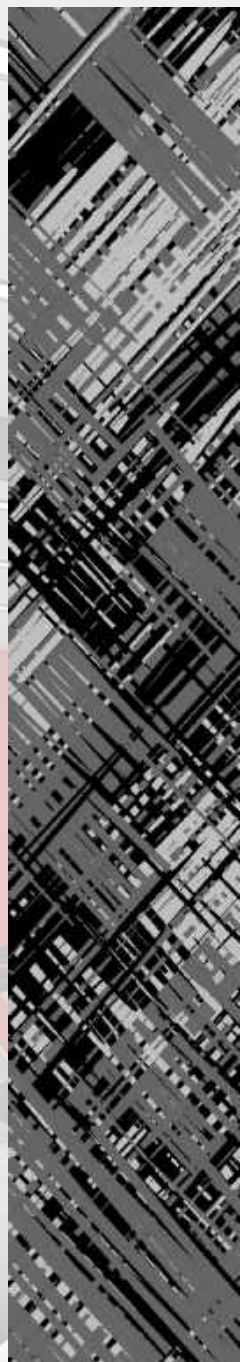

**Color**  
488 CX05 HT06

**Thickness**  
8 mm

**Installation**  
Random

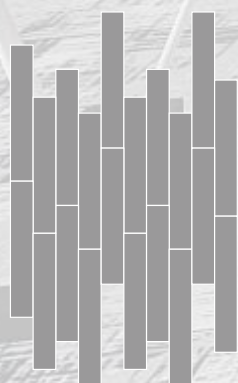














**Color**  
488 CX 10 HT07

**Thickness**  
2.5 mm

**Installation**  
Random

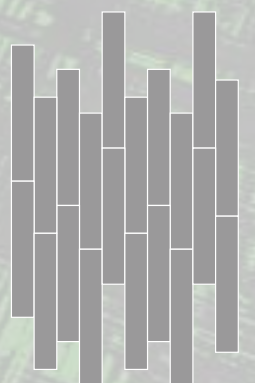






**Colors**  
488 CX03 HT07

**Thickness**  
10 mm

**Installation**  
Random

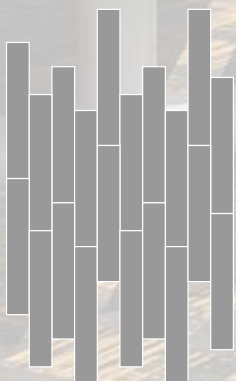















**Color**  
488 CX16 HT11

**Thickness**  
10 mm

**Installation**  
Random

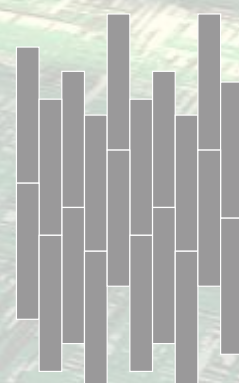



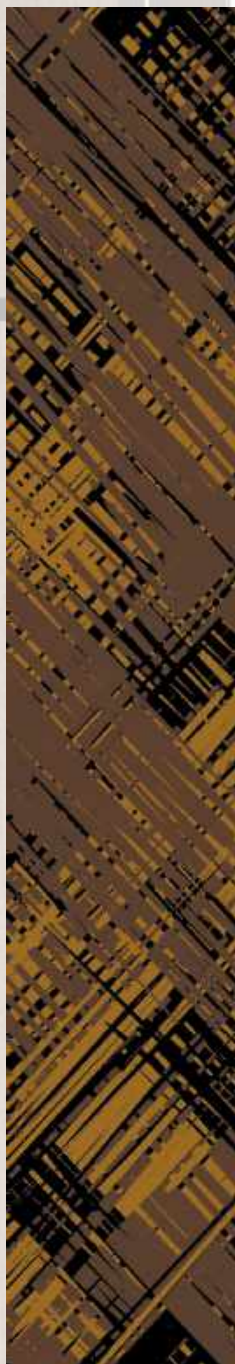


**Colors**  
488 CX18 HT07

488 CX17 HT18

**Thickness**  
6 mm

**Installation**  
Random & Cut to Contour

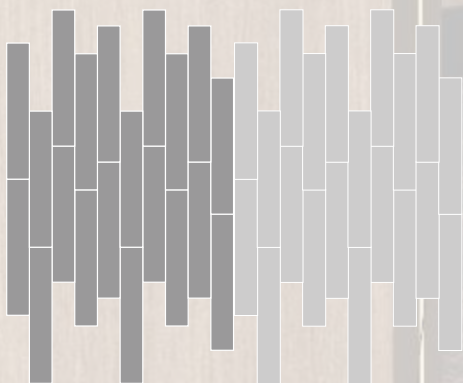













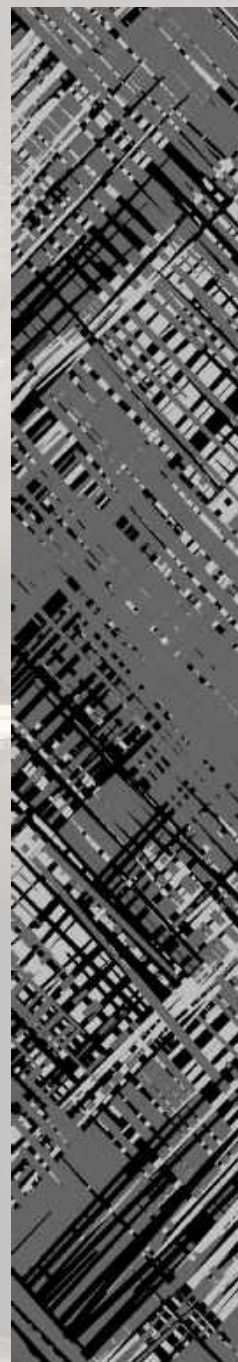


**Color**  
488 CX05 HT06

**Thickness**  
10 mm

**Installation**  
Random

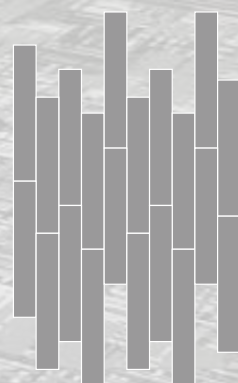




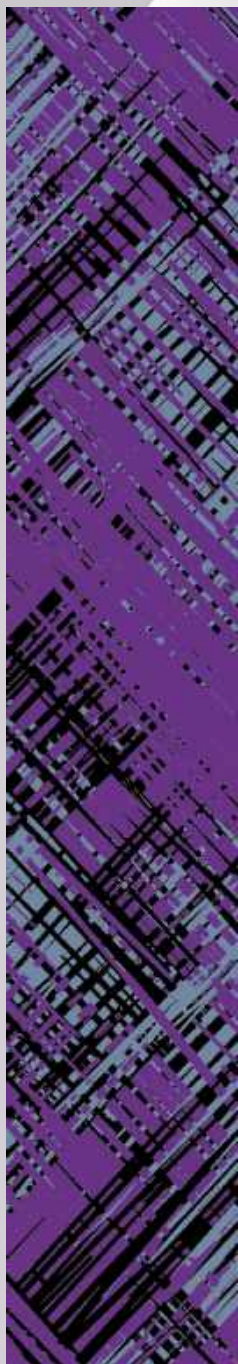

**Colors**  
488 CX08 HT19

**Thickness**  
8 mm

**Installation**  
Random

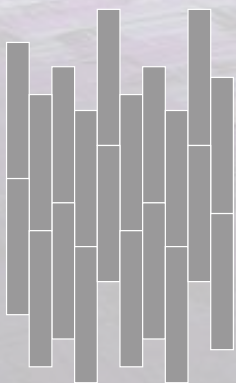












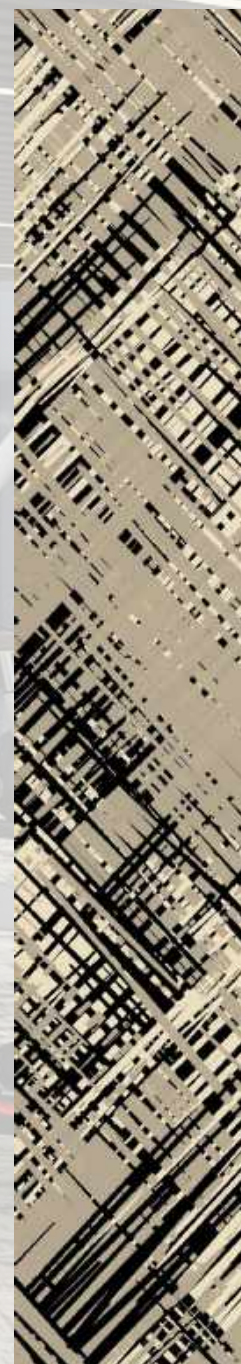

**Color**  
488 CX15 HT16

**Thickness**  
10 mm

**Installation**  
Random








**Colors**  
488 CX16 HT01

**Thickness**  
6 mm

**Installation**  
Random

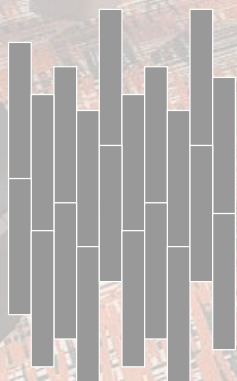








# Standard Colors.

Neoflex Crosshatch Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.


The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.

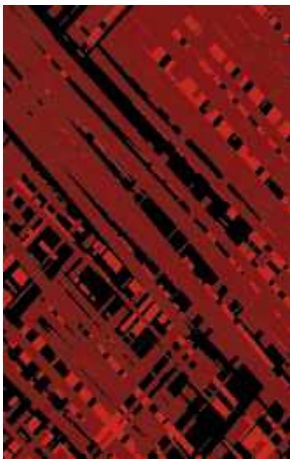

488 CX02 HT04




488 CX03 HT07

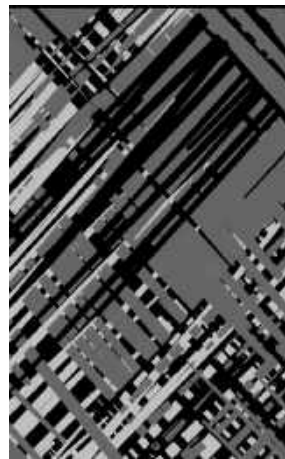

488 CX05 HT06



488 CX05 HT07

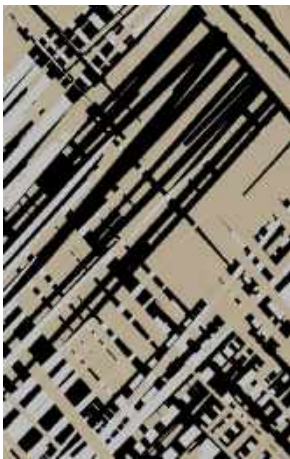

488 CX05 HT16



488 CX05 HT18



488 CX06 HT04



488 CX06 HT07



488 CX06 HT18



488 CX08 HT06



488 CX08 HT19



488 CX08 HT20






488 CX09 HT20



488 CX10 HT07




488 CX10 HT11

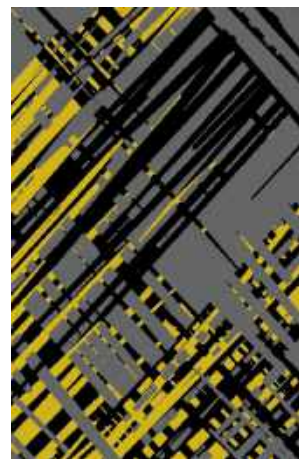

488 CX13 HT06



488 CX15 HT05

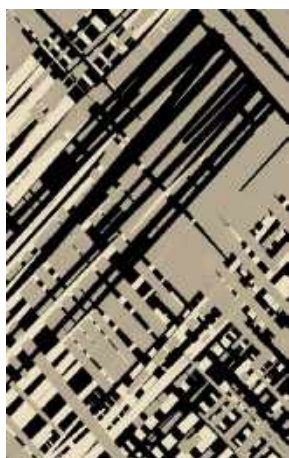


488 CX15 HT16



488 CX15 HT17



488 CX15 HT18

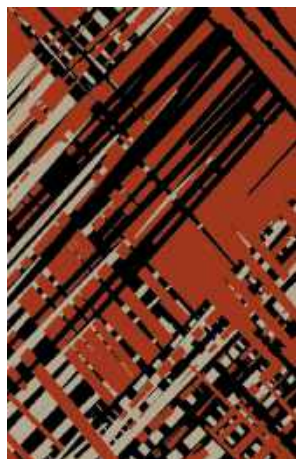


488 CX16 HT01




488 CX16 HT07




488 CX16 HT11

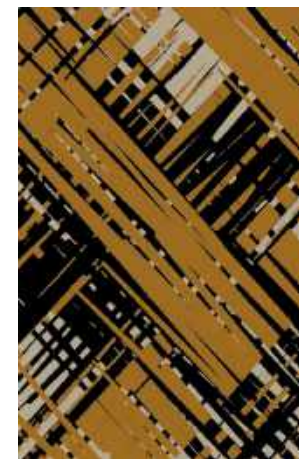


488 CX16 HT17

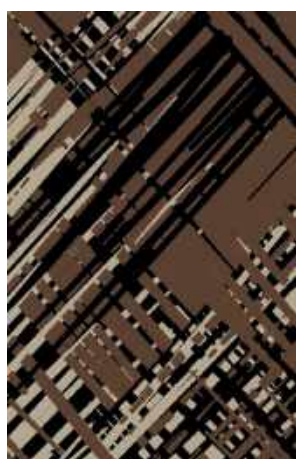

488 CX16 HT18

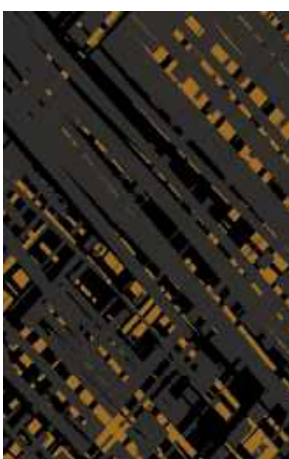

488 CX17 HT07

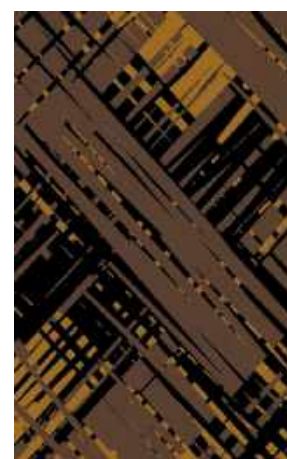

488 CX17 HT18




488 CX18 HT07




# Installation Options.

Neoflex Crosshatch Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


## Random

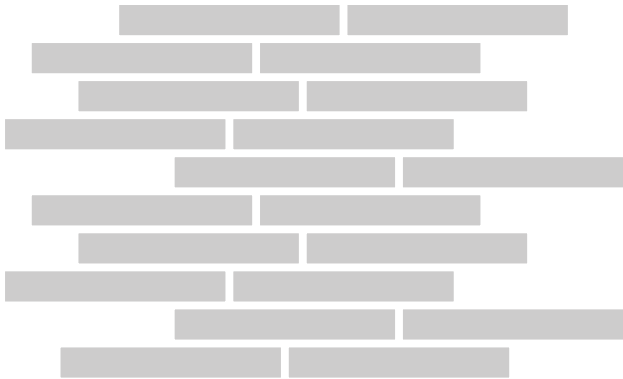


## 2-Color Random

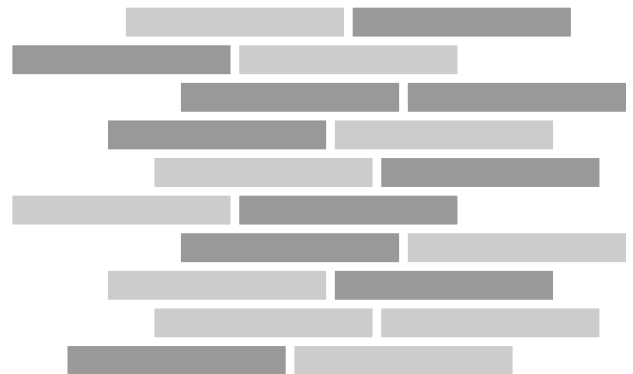


## 2-Color Random

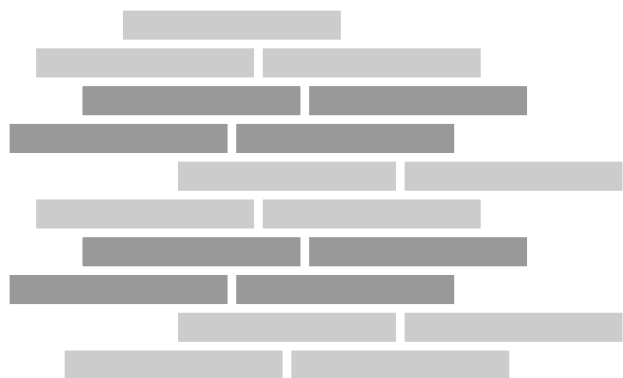

## 2-Color Random

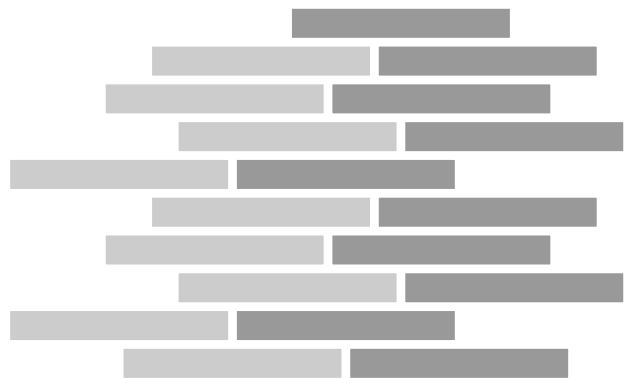

## 3-Color Random

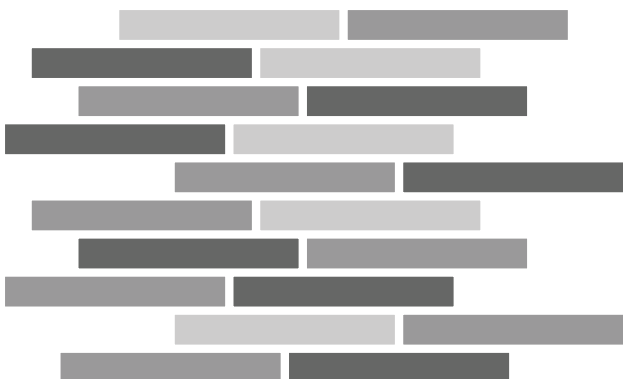



# Technical Specifications.


Neoflex Crosshatch Fitness Flooring is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited guarantee. Its performance surpasses other types of rubber flooring as well as resilient vinyl, PVC laminate or EVA foam.

Property	Standard	Result
Thickness		2.5 mm, 6 mm, 8 mm, 10 mm
Dimensions		1200 mm x 200 mm
Weight		± 4.65 kg/sqm
Hardness	ISO 7619-1:2010	62.1° Shore A
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate
Dynamic Coefficient of Friction	EN 13893:2012	0.7
Light Fastness	ISO 105-B02:2013	7-8 Grade
Residual Indentation	ISO 24343-1:2002	0.18 mm
Dimensional Stability	ISO 23999:2012	0.5%
Flammability	EN 13501-1	Efl (Optional Cfl-s1)
Installation		Stikibak™ or Full-Bond

## Standard Thicknesses.

Neoflex Crosshatch Series is manufactured in 4 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EPDM top layer. 6mm, 8mm and 10mm thicknesses consist of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

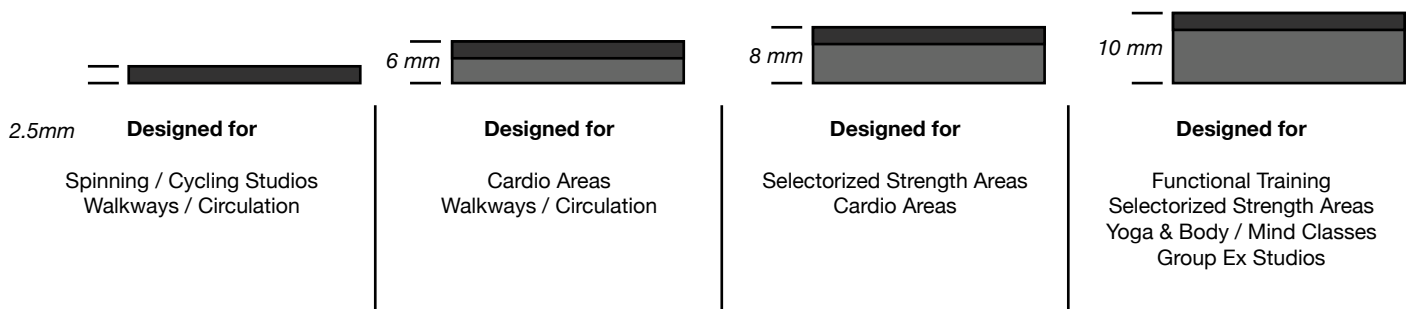

If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Crosshatch Series can be adhered on top.









## Limitless Potential.

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Crosshatch Series.

Rephouse manufactures a complete range of Fitness Flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.



[www.rephouse.com](http://www.rephouse.com)



[info@rephouse.com](mailto:info@rephouse.com)



@rephouse



@rephouse



